

Functions	Series 531	Series 532
Depth gauge		

Specifications

Accuracy: DIN 862

Delivered in soft case

Optional accessories

Extension for depth measurement see page 148

Metr. ISO-Gew.			
Nenn- est. ext. ø mm	Stig. Passo mm	Kern- fond. int. ø mm	Bohr- trap. meche bores ø mm
3	0,5	2,46	2,5
4	0,7	3,24	3,3
5	0,8	4,15	4,2
6	1	4,92	5
8	1,25	6,65	6,8
10	1,5	8,35	8,5
12	1,75	10,11	10,2
16	2	13,84	14
20	2,5	17,29	17,5
Whitworth			
2 in.	GG/in	ø mm	ø mm
1/4	20	4,72	5,0
5/16	18	6,13	6,4
3/8	16	7,49	7,7
1/2	12	9,90	10,25
5/8	11	12,50	12,8
3/4	10	15,9	16,25
7/8	9	18,61	19
1	8	21,33	21,75
101995			

With Thread table
No. 101995 D
on the back side,
531-122 only

Caliper

- With depth gauge.
- Caliper and slide made of hardened, corrosion-free steel.
- Measuring surface and nonius satin chrome finished.
- Raised sliding surfaces.


Series 531

with moment adjustment




531-122

Measuring range mm	No.	Jaw length mm	Nonius		L mm	a mm	b mm	c mm	d mm	Mass g
			top	bottom						
0-150	531-122	40	1/128"	0,05 mm	231	40	21,0	16,5	16	142
0-200	531-108	50	1/128"	0,05 mm	288	50	24,5	20,0	16	175
0-300	531-109	64	1/128"	0,05 mm	403	64	27,5	22,0	20	350




Easy reading due to nonius
scale inclined by 14 degrees

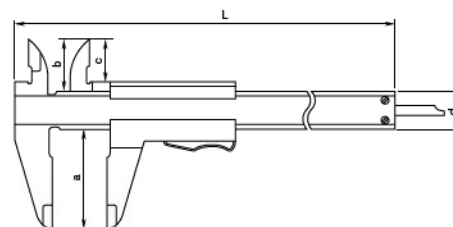


Series 532

with fine adjustment

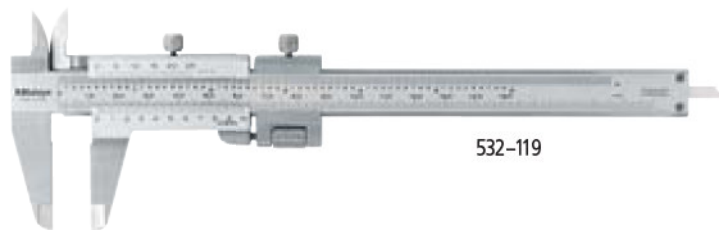

532-119

Measuring range mm	No.	Jaw length mm	Nonius		L mm	a mm	b mm	c mm	d mm	Mass g
			top	bottom						
0-130	532-119	40	1/1000"	0,02 mm	231	40	21,0	16,5	16	165
0-180	532-120	50	1/1000"	0,02 mm	288	50	24,5	20,0	16	202
0-280	532-121	64	1/1000"	0,02 mm	403	64	27,5	22,0	20	395



Easy reading due to nonius
scale inclined by 14 degrees

